THE HŌME GALLERY

Home is where you place it

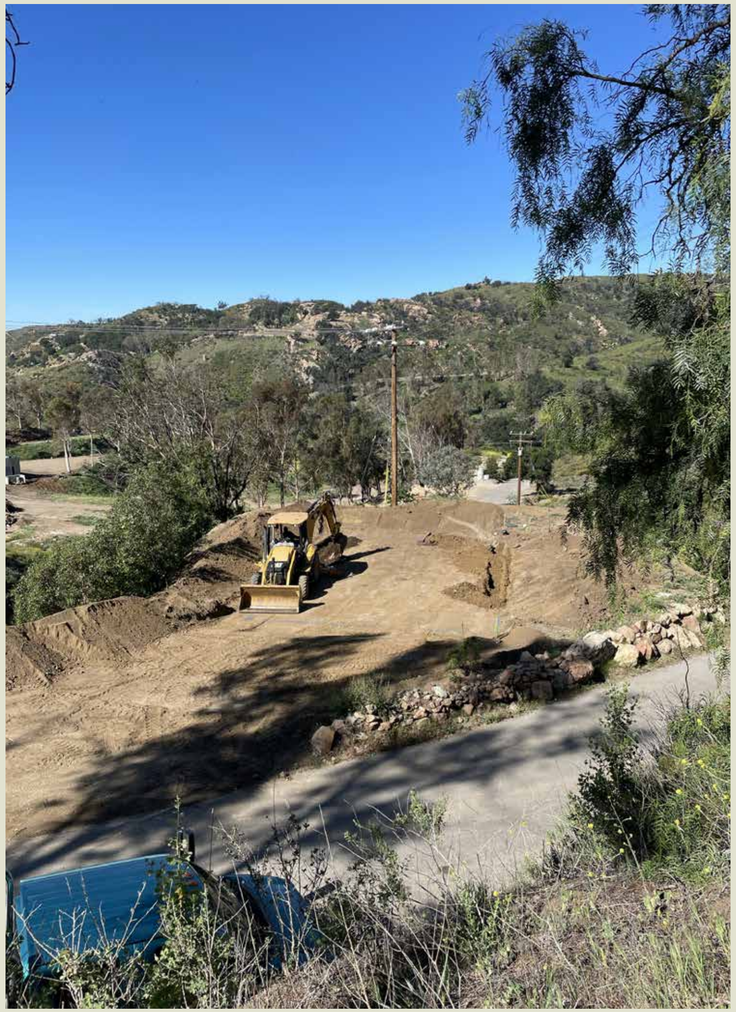

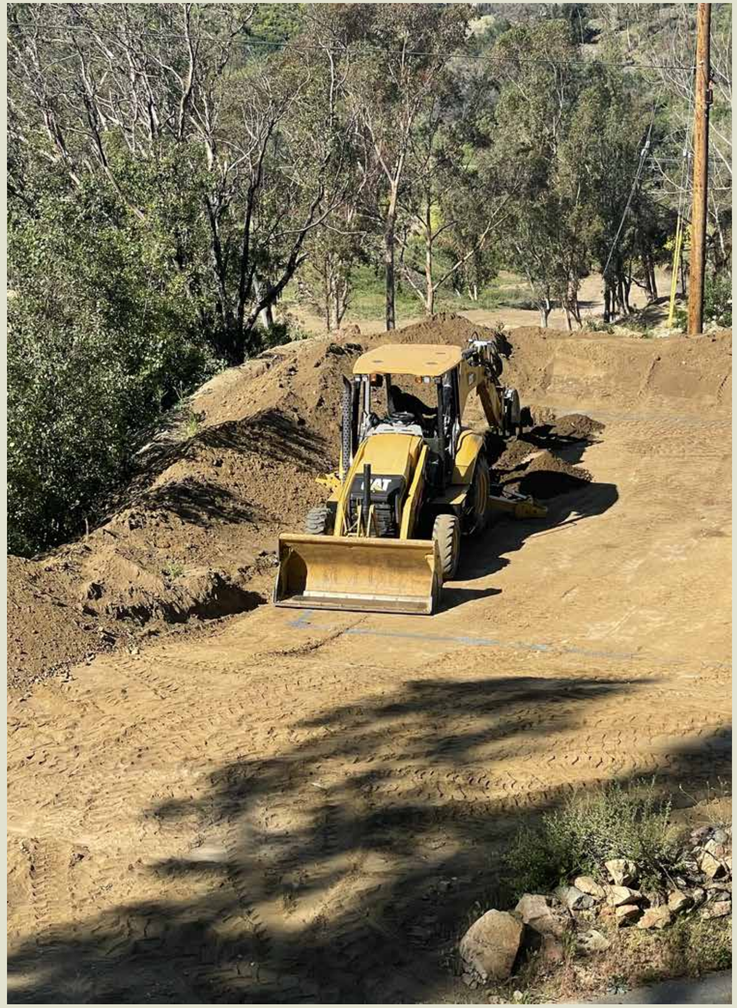

Sub-set preparation

Grading the building pad and excavating a “hole” for the home to roll into

Home is easily delivered to its new location

The home is built on its own chassis, that means when it comes time for placement, all that's needed is a tow truck.

Ground is being prepared

The team covers the area with a vapor barrier and sets up the home on a pier system.

Connecting the sections

The team unwraps the protecting plastic wrap and “marries” the sections together.

The ground is trenched for the foundation

Depending on soil and municipal requirements, the crew will trench for footings.

Perimeter wall with crawl space being built

The home is built “foundation ready,” and is supported by both the pier system and the perimeter foundation wall.

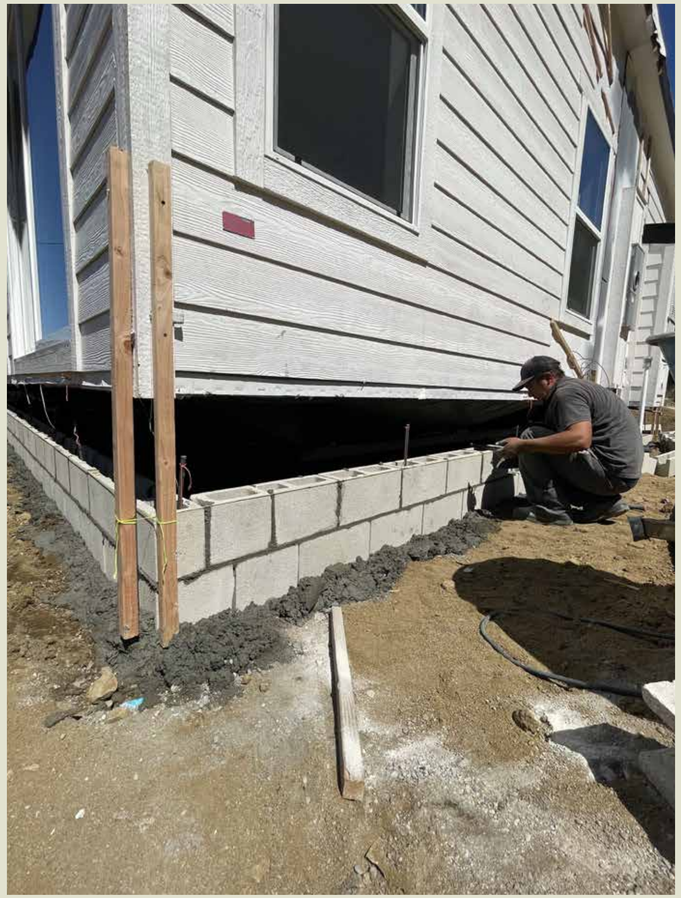

Perimeter wall with crawl space being built

Crawl space with top side entry point. This wall will be back-filled so it is not visible.

Back-fill

The soil around that was excavated is now being pushed back and compacted around the home, Making the home leveled with the ground.

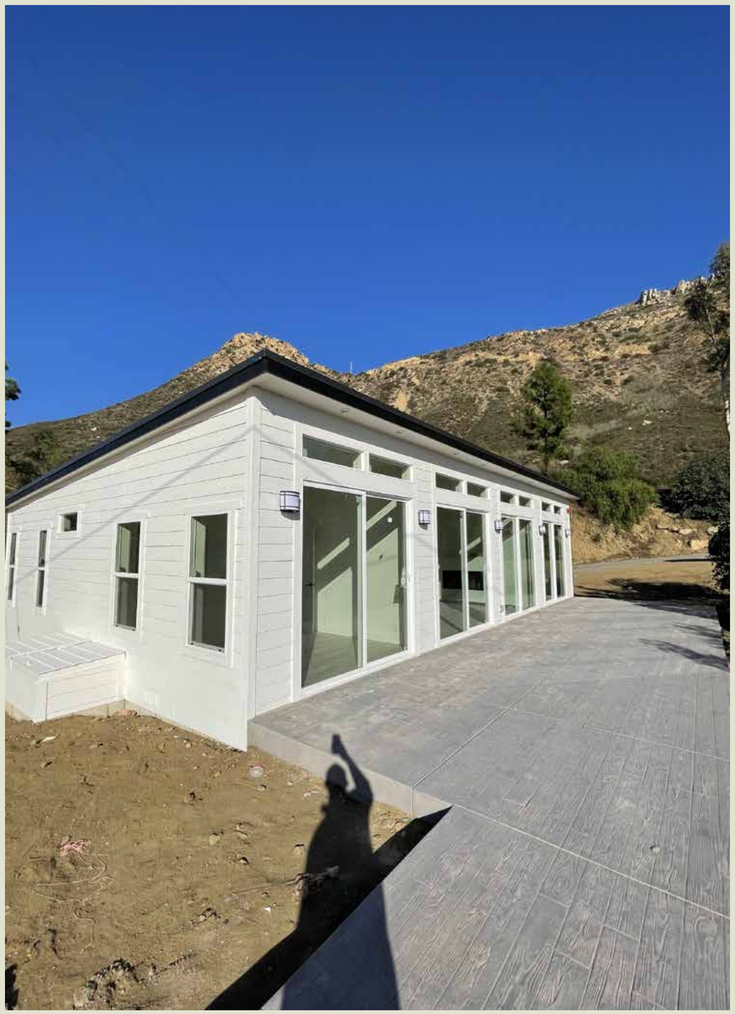

Cement deck

In a Sub-set installation, the deck is leveled with the floor allowing for an on-grade slab.

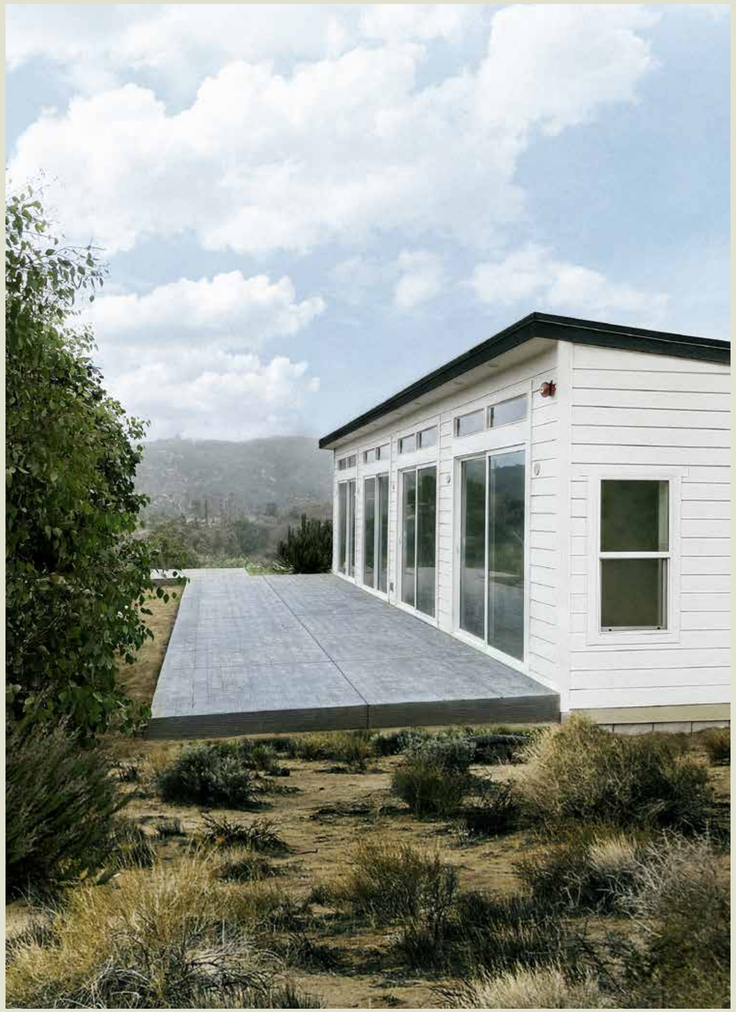

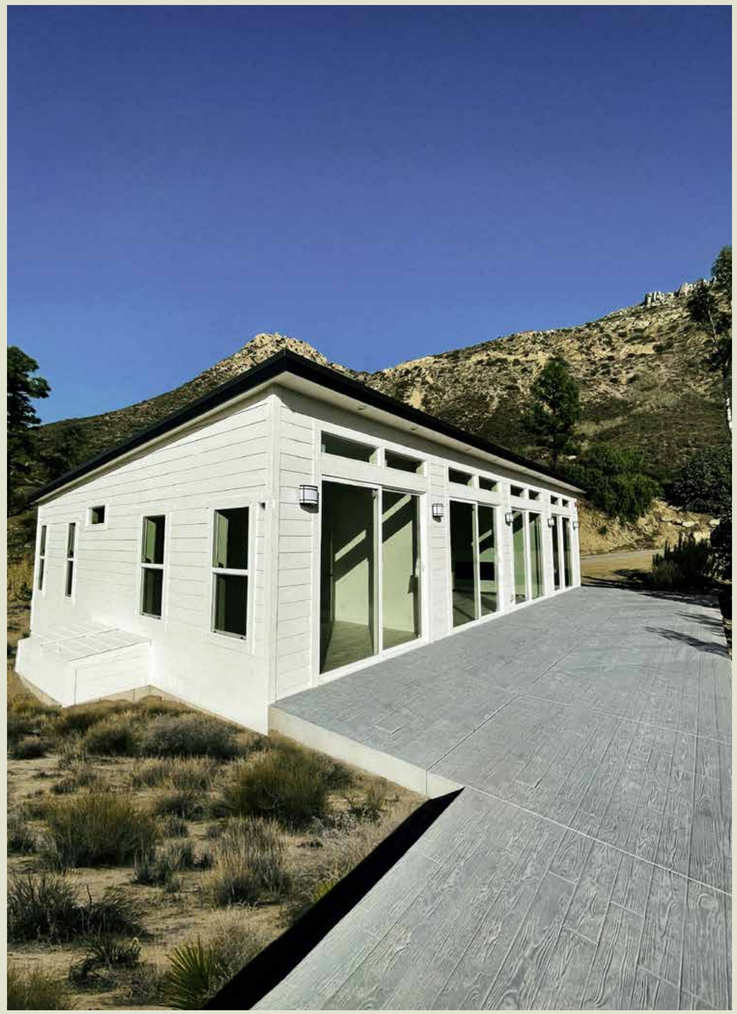

The slab look

Sub-sets create the illusion of a slab foundation, while keeping the crawl space and service areas hidden. Due to the deck height it eliminates the need for railing and steps

Thank You

THE HOME GALLERY